
Tel: 800.597.9732







The use of the DuraFlange connecting system, installed and sealed per manufacturer's recommendations, is suitable for use on all systems across a range of internal duct pressure classes; from positive 10" S.P.W.G. to negative 6" S.P.W.G.

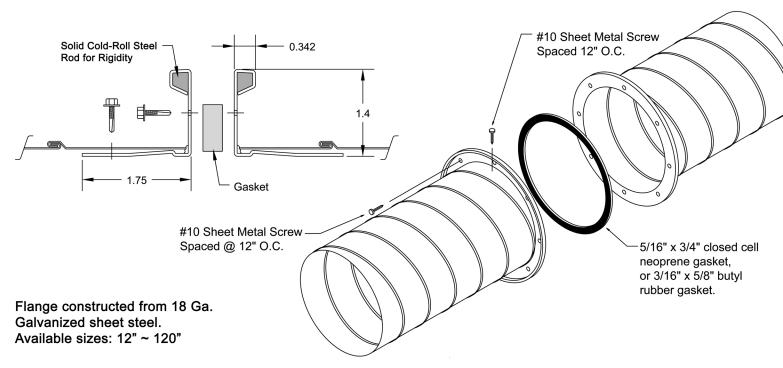